

Type**Perforated Nylon Sleeves****CAN BE USED FOR**

chemical industry

ADVANTAGEOUS FEATURES

Resin sleeves are the effective way to create a fixing where there is a hollow void, such as for perforated bricks and blocks, or a more porous material for example blockwork.

Resin is injected to fill the volume of the sleeve, and then forced through the fine perforations once the metal fixing rod is inserted.

AVAILABLE

in different colour and packaging (also look blister)



TECHNICAL SPECIFICATION

Internal Threaded Socket Sleeve	Dd(mm)	Dint
M6 12/50	12	10,5
M6 12/80	12	10
M8 16/85	16	14
M10 20/85	16	14
M12 20/85	20	18

the fixing rod at 90 degrees to the substrate.

Also for use with an internal threaded socket. This is inserted into the sleeve instead

Dint: Inner diameter sleeve

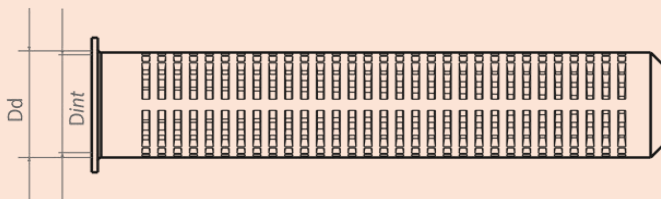

After the drilling and hole cleaning process, insert the nylon sleeve into the drilling hole, closing the lid securely in position.

Inject chemical anchor resin through the sleeve hole, from the bottom withdrawing outwards until completely full.

Insert the fixing through the hole in the lid in a rotating motion to the end of the hole.

The securing cap has the benefit of keeping

Dd: hole diameter

of a fixing rod, thus allowing for a removable threaded fixing. Db: Rod diameter

Packaging is standard. Other packaging types, will be charged extra.

All extra demands must be known before the order conformation.

*deviation on weight is always possible (different material, batch, etc)

Storage Before use plastic items in production, keep them at least 24 hours indoor by 18-20°C.

It is strictly forbidden to storage pallet on pallet.

For colour variation contact office.slovenia@sopi-closures.com

All products are in tolerance according to DIN 16742 or otherwise agreed